



300 Watt RF Amplifier

FMAMP300




Features

- 300W RF output power
- High gain
- Latest enhancement mode FET device
- Good efficiency
- Highly reliable

Applications

- Power increase for low power Exciters
- Reserve back-up
- Independent radio service
- Community radio service

The FMAMP300 is a 300W RF Amplifier for FM broadcast systems. Easy to install, it represents unrivalled performance and reliable at such a low cost. Metering of systems status, plus forward and reflected power levels is provided on the front panel. A TTL control input and status output connector on the rear panel allows easy integration into new or existing remote monitoring or control systems, plus automatic switching in back-up systems. Filtering ensures compliance with broadcast regulations.

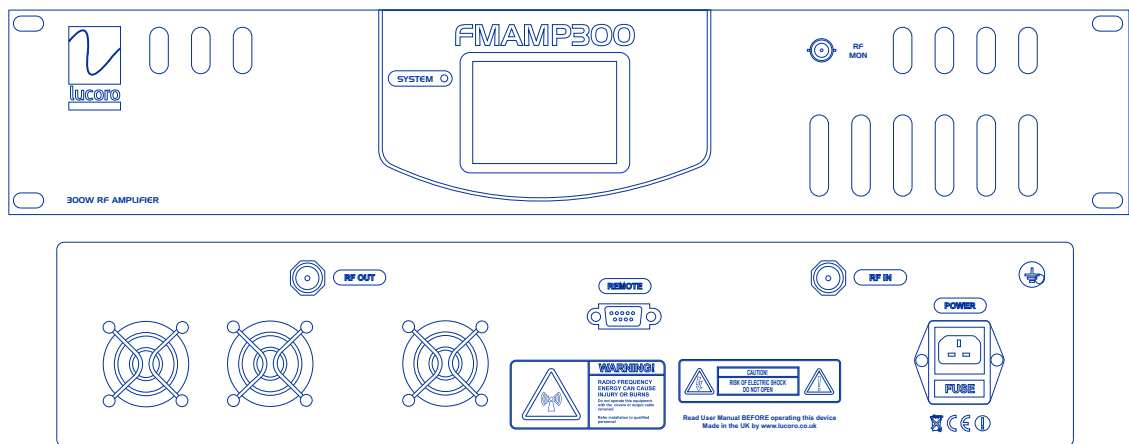

Specifications

Dimensions:	2U 88 H x 482 W x 290 D (mm)	Frequency:	87.5 - 108MHz
Weight:	5.0kg	Output Power:	50 - 300W
RF input:	N female 50ohm	Power stability:	Better than 0.25dB
RF output:	N female 50ohm	Harmonics:	<-65dBc (30-1000MHz)
RF monitor:	BNC female 50ohm (- 40dB)	Voltage:	100 - 250Vac 50-60Hz
Input level:	- 2W for 300W output		
I/O Control:	9-way D-sub female		

Lucoro Broadcast

www.lucorobroadcast.com sales@lucorobroadcast.com

Lucoro Limited, Clay Pit Lane, Bar Lane Industrial Estate Rocliffe York YO51 9FS

We reserve the right to alter specifications without notice. E&OE. Illustrations are for guidance only and do not form a contract.