


# DC01/N/F-M DUAL DIRECTIONAL COUPLER



Dimensions:	118 L x 26 W x 60 D (mm)
Weight:	0.15kg
Input / output connectors:	N-Type
Port connectors:	SMA
Operating Temperature:	+0° to +42°C
Max continuous CW power:	500W
Coupling (@98MHz):	-34dB typical
Directivity:	27-30dB typical
Insertion Loss:	0.15dB typical

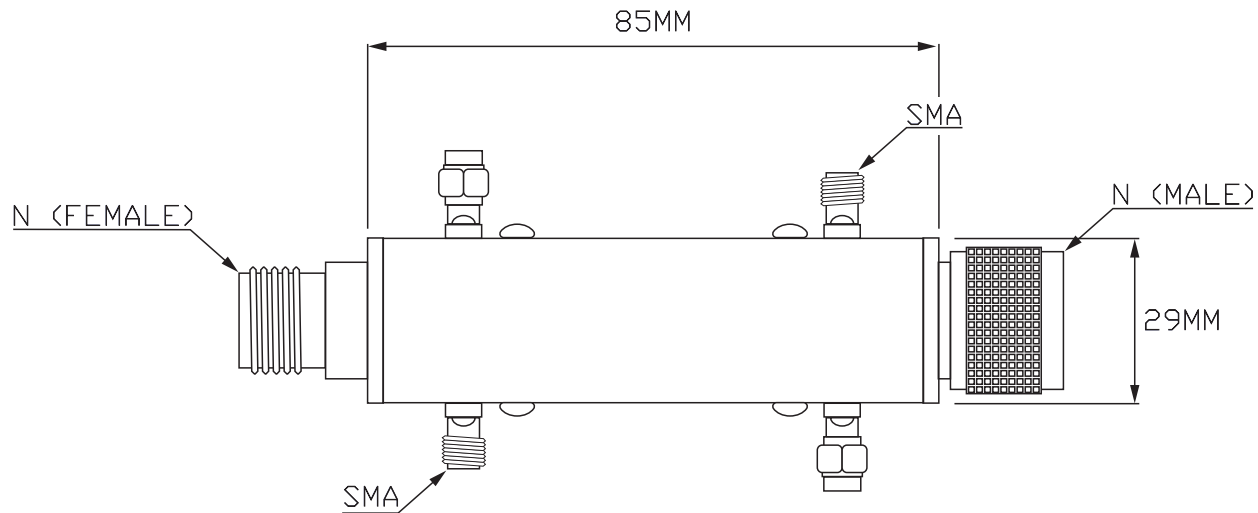


WARNING: Do not exceed maximum rated RF power.

Do not drop.

Avoid prolonged use with loads which exhibit poor SWR.

Measure both FWD and REF port coupling factors separately before DUT measurements.

Lucoro Limited assumes no responsibility for the use of this product and shall not be liable for any damages or injuries arising from its use.

 <p>Lucoro Limited Clay Pit Lane Bar Lane Ind Est Roecliffe York YO30 9FS 01423 313550</p>	Revision	Date	Title	Drawn By	Checked By	Scale
			DC01/N/F-M			