




End-fed Half-wave Dipole


FMANT-05



E-plane:

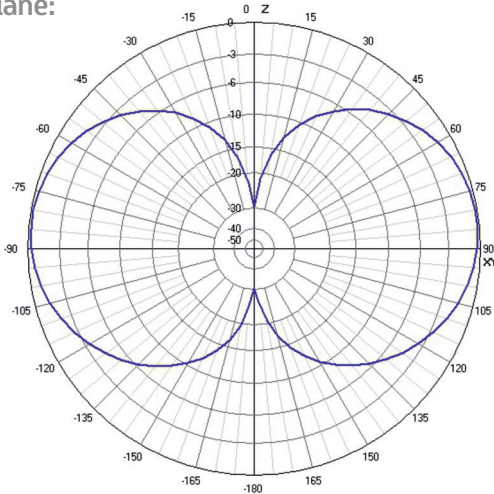

H-plane:

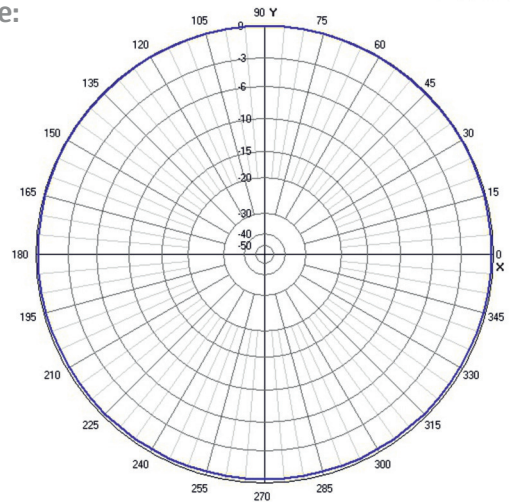

Features

- Rugged construction
- Frequencies from 87.5 to 108MHz
- Mounts in 2" pole
- Side clamp mounting option
- Made in Great Britain

Applications

- Community or campus radio
- RSL or L-RSL broadcasting
- Commercial stations

An End-fed Half-wave broadcast antenna made to the highest of specifications, to provide uniform omnidirectional coverage. The FMANT05 is made using high specification lightweight aluminium and reinforced fibreglass shroud.

Specifications

Weight:	1.9kg	Power:	200W
Frequency:	87.5-108MHz (state frequency)	Impedance:	50 ohms
Gain:	0dBd (2.15dBi)	Connector:	N-type (F)
VSWR:	<1.5:1		

Lucoro Broadcast

www.lucorobroadcast.com sales@lucorobroadcast.com

Lucoro Limited, Clay Pit Lane, Bar Lane Industrial Estate Rocliffe York YO51 9FS

We reserve the right to alter specifications without notice. E&OE. Illustrations are for guidance only and do not form a contract.